Model JB (type I, type II)-series Load cell Junction Boxes



Features:

- Aluminum crust with plastic covered, to select special good and durable earing tie-in.
- Adopting high precision and low shift resistance and capacitors to confirm the operating precision and stability of system.
- Special separate tie-in for load cell cable and signal cable to ensure the connecting reliability.



Dimension: 250 x 80 x 57 mm for 2, 3, 4, 6, 8 lines


JB (type I)-2 for 2 lines

JB (type I)-3 for 3 lines

JB (type I)-4 for 4 lines

JB (type I)-6 for 6 lines

JB (type I)-8 for 8 lines

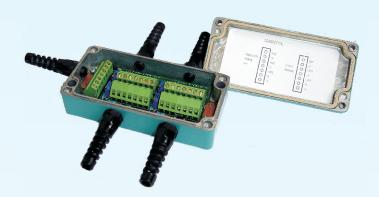

Dimension: 135 x 65 x 38 mm

for 2, 3, 4 lines

JB (type II)-2 for 2 lines

JB (type II)-3 for 3 lines

JB (type II)-4 for 4 lines

Specifications:

small dimensions and light weights easy assembling and adjusting all sealed for anti– water and humidity working temperature: -40 ~ +85C



Tel.: +32-3-238 6469

Fax: +32-3-238 4171