

ice point™ Calibration Reference Chamber

High Precision— Uses Freezing Water to Maintain 0°C (32°F)

TRCIII

All Models



Use up to
6 probes at
one time
with TRCIII

TRCIII, shown
smaller than actual size.

- ✓ A 0°C (32°F) Thermoelectric “Refrigerator”
- ✓ Eliminates Old Fashioned “Ice Bath”
- ✓ For Versatile Use in the Factory, Laboratory, Instrument Shop
- ✓ Calibration of All Temperature Instruments and Sensors
- ✓ Rugged Outer Case for Safe Portability
- ✓ Accepts Up to 6 Probes
- ✓ Available in 120 or 220 Vac Models
- ✓ NIST Traceable Calibration Available
- ✓ Companion Dry Block Probe Calibrator Available (Model CL900/950)

The TRCIII ice point™ Calibration Reference Chamber relies on the equilibrium of ice and distilled, deionized water at atmospheric pressure to maintain 6 reference wells at precisely 0°C (32°F). The wells extend into a sealed cylindrical chamber containing the distilled, deionized water. The outer walls of the chambers are cooled by thermo-electric cooling elements. The increase in volume produced by the creation of ice crystals within the

cell is sensed by the expansion of a bellows, which operates a microswitch and controls the cooling elements. The alternate freezing and thawing of the ice accurately maintains a 0°C (32°F) environment around the reference wells.

The automatic operational features of this instrument eliminate the need for frequent attention, required of common ice baths. On/off cycling of a pilot light indicates proper operation of the unit at ice point temperature.

Any combination of thermocouples may be used with this instrument by simply inserting the reference probes in the reference wells. Calibration of other types of temperature sensors at 0°C (32°F) may also be performed.

When accurate temperature measurements are required, the TRCIII ice point™ Chamber delivers the precision you need. The reference wells are maintained at 0°C (32°F) to within ±0.1°C and a stability of ±0.04°C for constant ambient. Continuous cycling operation maintains constant equilibrium conditions within the cell, eliminating the slow drift often experienced in common ice baths as melting



TRCIII ice point™ shown with companion CL950 dry block probe calibrator. See page K-25 for details.

occurs. TRP reference probes, used with the TRCIII, provide a junction from thermocouple alloys to copper wire, at the probe tip. When inserted into the TRCIII, TRP probes enable the change from thermocouple alloy to copper at 0°C (32°F), for accurate cold junction compensation.

OMEGACARE™ extended warranty program is available for models shown on this page. Ask your sales representative for full details when placing an order. OMEGACARE™ covers parts, labor and equivalent loaners.

Thermocouple TRP Features

- ✓ Made with Special Limits of Error Material
- ✓ All Standard Calibrations Available
- ✓ Comes Complete with Mating Connectors
- ✓ Can Be Ordered with 12, 24 or 36" Leads



Sturdy handle for easy portability.

Specifications

Reference Wells: 6 wells, $\frac{5}{32}$ " ID, $3\frac{3}{4}$ " deep; wells are thermally and electrically grounded to each other; accepts $\frac{1}{8}$ " OD probes

Reference Temperature: 0°C

Accuracy: $\pm 0.1^\circ\text{C}$ or better

Stability: $\pm 0.04^\circ\text{C}$ for constant ambient

Environmental Ambient: 2 to 32°C (35 to 90°F)

Power Required: 115/220 V, 60 Hz, 100 Watts

Stabilization Time: 2 or 3 hours depending on ambient temperature and thermal load



Dimensions:

305 H x 159 W x 322 mm D (12.0 x 6.25 x 12.7")

Weight: 9.5 kg (21 lb)

Caution:
Unit must not be allowed to freeze or damage will result.

TRP Applications

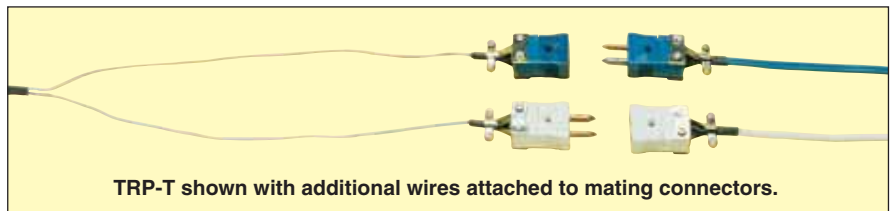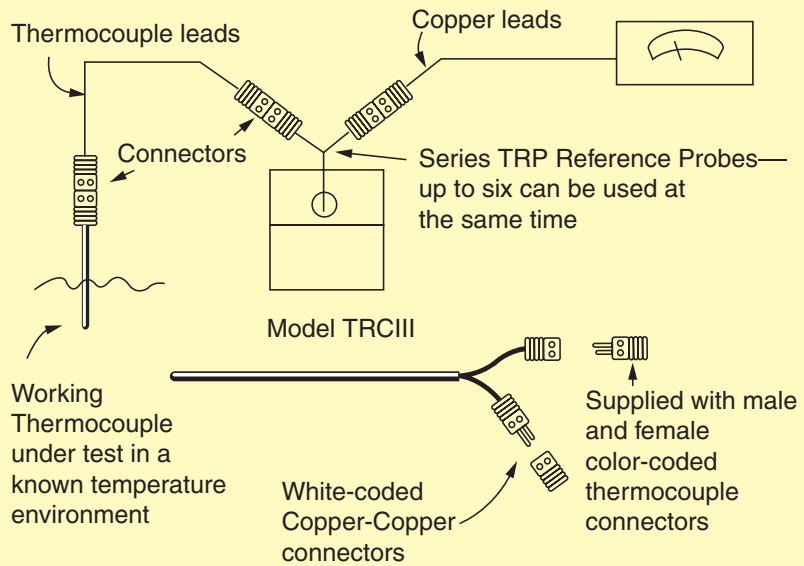

TRP-T shown with additional wires attached to mating connectors.

Thermocouple TRPs

Model No.	Thermocouple Material Type	
	+	-
TRP-K	CHROME Ω	ALOME Ω
TRP-T	Copper	Constantan
TRP-E	CHROME Ω	Constantan
TRP-J	Iron	Constantan
TRP-S	Platinum	Platinum 10% Rh
TRP-R	Platinum	Platinum 13% Rh
TRP-B	Platinum 30% Rh	Platinum 6% Rh
TRP-C	W 5% Re	W 26% Re
TRP-G	W	W 26% Re
TRP-D	W 3% Re	W 25% Re

For thermocouple Types J, K, T, E, standard length is 12". For 24" or 36" long leads add suffix "-24" or "-36" to model number.

For thermocouple Types R, S, B, C, G, D, standard length is 6". Add for each additional 6" and appropriate suffix.

MOST POPULAR MODEL HIGHLIGHTED!

To Order (Specify Model Number)

Model No.	Description
TRCIII	ice point™ reference 120 Vac operation
TRCIII-220	ice point™ reference 220 Vac operation
CAL-3	NIST-traceable calibration

Ordering Example: TRCIII, ice point™ reference cell, TRP-K, TRP-J, TRP-T, TRP-E, Type J, K, T and E temperature reference probes.

OCW-3, OMEGACARE™ extends standard 1-year warranty to a total of 4 years

omega.com[®]

Your One-Stop Source for Process Measurement and Control!

One Omega Drive | Stamford, CT 06907 | 1-888-TC-OMEGA (1-888-826-6342) | info@omega.com

www.omega.com



UNITED STATES

www.omega.com
1-800-TC-OMEGA
Stamford, CT.

CANADA

www.omega.ca
Laval(Quebec)
1-800-TC-OMEGA

GERMANY

www.omega.de
Deckenfronn, Germany
0800-8266342

UNITED KINGDOM

www.omega.co.uk
Manchester, England
0800-488-488

FRANCE

www.omega.fr
Guyancourt, France
088-466-342

CZECH REPUBLIC

www.omegaeng.cz
Karviná, Czech Republic
596-311-899

BENELUX

www.omega.nl
Amstelveen, NL
0800-099-33-44



More than 100,000 Products Available!

• Temperature

Calibrators, Connectors, General Test and Measurement Instruments, Glass Bulb Thermometers, Handheld Instruments for Temperature Measurement, Ice Point References, Indicating Labels, Crayons, Cements and Lacquers, Infrared Temperature Measurement Instruments, Recorders Relative Humidity Measurement Instruments, RTD Probes, Elements and Assemblies, Temperature & Process Meters, Timers and Counters, Temperature and Process Controllers and Power Switching Devices, Thermistor Elements, Probes and Assemblies, Thermocouples Thermowells and Head and Well Assemblies, Transmitters, Wire

• Flow and Level

Air Velocity Indicators, Doppler Flowmeters, Level Measurement, Magnetic Flowmeters, Mass Flowmeters, Pitot Tubes, Pumps, Rotameters, Turbine and Paddle Wheel Flowmeters, Ultrasonic Flowmeters, Valves, Variable Area Flowmeters, Vortex Shedding Flowmeters

• pH and Conductivity

Conductivity Instrumentation, Dissolved Oxygen Instrumentation, Environmental Instrumentation, pH Electrodes and Instruments, Water and Soil Analysis Instrumentation

• Data Acquisition

Auto-Dialers and Alarm Monitoring Systems, Communication Products and Converters, Data Acquisition and Analysis Software, Data Loggers Plug-in Cards, Signal Conditioners, USB, RS232, RS485 and Parallel Port Data Acquisition Systems, Wireless Transmitters and Receivers

• Pressure, Strain and Force

Displacement Transducers, Dynamic Measurement Force Sensors, Instrumentation for Pressure and Strain Measurements, Load Cells, Pressure Gauges, Pressure Reference Section, Pressure Switches, Pressure Transducers, Proximity Transducers, Regulators, Strain Gages, Torque Transducers, Valves

• Heaters

Band Heaters, Cartridge Heaters, Circulation Heaters, Comfort Heaters, Controllers, Meters and Switching Devices, Flexible Heaters, General Test and Measurement Instruments, Heater Hook-up Wire, Heating Cable Systems, Immersion Heaters, Process Air and Duct, Heaters, Radiant Heaters, Strip Heaters, Tubular Heaters

• [click here to go to the omega.com home page](http://www.omega.com) •